

●長壽命品

OMSシリーズ

JIS C 5101  
CE-04

●Long Life Assurance


TYPE OMS

JIS C 5101  
CE-04

■FEATURES

- Operating with wide temperature range -55~+105°C
- Long life assurance
- Load life of 5000 hours
- RoHS & REACH compliant, Halogen-free

■寸法図/DIAGRAM OF DIMENSIONS

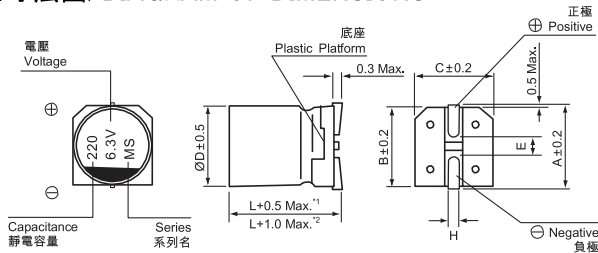

\*1. Applicable to  $\varnothing 5$ - $\varnothing 8$  適用於 $\varnothing 5$ - $\varnothing 8$   
\*2. Applicable to  $\varnothing 10$  and above 適用於 $\varnothing 10$  和 $\varnothing 10$  以上

$\varnothing D \times L$	5×6	6.3×6	8×7	6.3×7	6.3×9.5	8×12	10×12
A	6.0	7.3	9.0	7.3	7.3	8.0	10.0
B	5.3	6.6	8.3	6.6	6.6	8.3	10.3
C	5.3	6.6	8.3	6.6	6.6	8.3	10.3
E	1.6	2.1	3.2	2.1	2.1	3.2	4.6
L	6.0	6.0	7.0	7.0	9.5	12.0	12.0
H	0.5-0.8	0.5-0.8	0.8-1.1	0.5-0.8	0.5-0.8	0.8-1.1	0.8-1.1

■性能/PERFORMANCE SPECIFICATIONS

カテゴリー温度範囲	CATEGORY TEMPERATURE RANGE	-55 ~ +105°C										
標準静電容量許容差	STANDARD CAPACITANCE TOLERANCE	±20% at 120Hz, 20°C										
漏れ電流 (最大値)	LEAKAGE CURRENT (MAX.VALUE)	≤Specified value (after 2 minutes application of rated voltage at 20°C)										
損失角の正接 (最大値)	DISSIPATION FACTOR (MAX.VALUE)	≤Specified value at 120KHz, 20°C.										
E.S.R	E.S.R.	≤Specified value at 100KHz, 20°C.										
低温特性	Stability at Low Temperature	Measurement frequency 測試頻率: 100KHz <table border="1"> <tr> <td>Impedance Ratio 阻抗比 ZT/Z20 (max)</td> <td>Z(+105°C)/Z(20°C) ≤ 1.25 Z(-55°C)/Z(20°C) ≤ 1.25</td> </tr> </table>	Impedance Ratio 阻抗比 ZT/Z20 (max)	Z(+105°C)/Z(20°C) ≤ 1.25 Z(-55°C)/Z(20°C) ≤ 1.25								
Impedance Ratio 阻抗比 ZT/Z20 (max)	Z(+105°C)/Z(20°C) ≤ 1.25 Z(-55°C)/Z(20°C) ≤ 1.25											
耐久性	LOAD LIFE TEST	<table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>150% or less of initial specified value</td> </tr> <tr> <td>ESR</td> <td>150% or less of initial specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Initial specified value or less</td> </tr> </table> After 5000 hours application of the rated voltage at 105 °C, they meet the characteristics listed below.	Capacitance Change	Within ±20% of initial value	Dissipation Factor	150% or less of initial specified value	ESR	150% or less of initial specified value	Leakage Current	Initial specified value or less		
	Capacitance Change	Within ±20% of initial value										
Dissipation Factor	150% or less of initial specified value											
ESR	150% or less of initial specified value											
Leakage Current	Initial specified value or less											
	MOISTURE RESISTANCE	After reflow soldering and restored at room temperature, they meet the characteristics listed below.										
定格リップル電流補正係数	RIPPLE CURRENT & FREQUENCY MULTIPLIERS	<table border="1"> <tr> <th>Frequency(Hz)</th> <th>120Hz ≤ f ≤ 1KHz</th> <th>1KHz ≤ f ≤ 10KHz</th> <th>10KHz ≤ f ≤ 100KHz</th> <th>100KHz ≤ f ≤ 300KHz</th> </tr> <tr> <td>Coefficient</td> <td>0.10</td> <td>0.40</td> <td>0.70</td> <td>1.00</td> </tr> </table>	Frequency(Hz)	120Hz ≤ f ≤ 1KHz	1KHz ≤ f ≤ 10KHz	10KHz ≤ f ≤ 100KHz	100KHz ≤ f ≤ 300KHz	Coefficient	0.10	0.40	0.70	1.00
Frequency(Hz)	120Hz ≤ f ≤ 1KHz	1KHz ≤ f ≤ 10KHz	10KHz ≤ f ≤ 100KHz	100KHz ≤ f ≤ 300KHz								
Coefficient	0.10	0.40	0.70	1.00								

■定格リップル電流補正係数


リップル周波数が標準品一覧表の規定値と異なる場合には、下表の係数を乗じた値以下でご使用下さい。

When the ripple frequency differs from the specification shown in the list of standard products, multiply the value with the coefficient shown below, and use the products under the obtained value.

周波数補正係数/FREQUENCY CORRECTION FACTOR

Cap.( $\mu F$ )	Frequency (Hz)			
	120	1K	10K	100K
27~180	0.40	0.75	0.90	1.00
220~560	0.50	0.85	0.94	1.00
680~1800	0.60	0.87	0.95	1.00
2200~3900	0.75	0.90	0.95	1.00
4700~10000	0.85	0.95	0.98	1.00

■品番ご指定法/HOW TO SPECIFY ITEM NUMBER

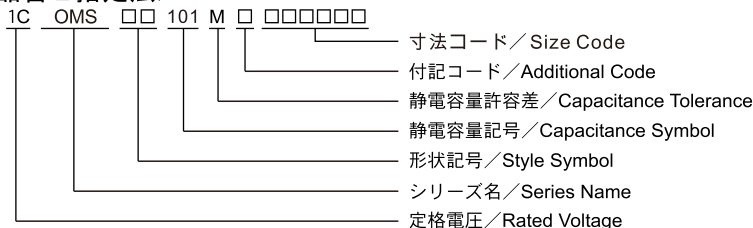

**■寸法表/CASE SIZE TABLE**
**■Impedance[Max.Value Ω] at 20°C 100kHz**
**■Ripple Current [Max. value mA] at 105°C 100kHz**

WV (V)		4 (0G)					6.3 (0J)				
Cap. (μF)	Parameter	Case size ∅D×L (mm)	Dissipation factor (tan δ)	Leakage current (μA)	ESR (mΩ) max. 20°C, 100KHz	Ripple current (mA rms) 105°C, 100KHz	Case size ∅D×L (mm)	Dissipation factor (tan δ)	Leakage current (μA)	ESR (mΩ) max. 20°C, 100KHz	Ripple current (mA rms) 105°C, 100KHz
100	101					5 × 6 (6.3 × 6)	0.12 (0.12)	126 (126)	25 (22)	2400 (2800)	
120	121					6.3 × 6	0.12	151	22	2800	
150	151	5 × 6	0.12	120	25	2200					
220	221					6.3 × 6 (8 × 7)	0.12 (0.12)	277 (277)	20 (22)	2800 (3200)	
330	331	6.3 × 6 (8 × 7)	0.12 (0.12)	264 (264)	20 (22)	2800 (3200)					
390	391					8 × 7	0.12	491	22	3200	
470	471					6.3 × 9.5	0.12	592	18	3200	
560	561	8 × 7	0.12	448	18	3600					

WV (V)		10 (1A)					16 (1C)				
Cap. (μF)	Parameter	Case size ∅D×L (mm)	Dissipation factor (tan δ)	Leakage current (μA)	ESR (mΩ) max. 20°C, 100KHz	Ripple current (mA rms) 105°C, 100KHz	Case size ∅D×L (mm)	Dissipation factor (tan δ)	Leakage current (μA)	ESR (mΩ) max. 20°C, 100KHz	Ripple current (mA rms) 105°C, 100KHz
33	330	5 × 6	0.12	66	40	1300					
39	390					5 × 6 (6.3 × 6)	0.12 (0.12)	125 (125)	35 (30)	2000 (2200)	
56	560	6.3 × 6	0.12	112	27	2300					
68	680	5 × 6	0.12	136	30	2100	6.3 × 6	0.12	218	30	2200
82	820					8 × 7	0.12	262	28	2800	
120	121	6.3 × 6	0.12	240	27	2300	8 × 7	0.12	384	28	2800
150	151	8 × 7	0.12	300	30	2600					
220	221	6.3 × 7	0.12	440	22	2800					
270	271	8 × 7	0.12	540	22	3200					

WV (V)		25 (1E)					35 (1V)				
Cap. (μF)	Parameter	Case size ∅D×L (mm)	Dissipation factor (tan δ)	Leakage current (μA)	ESR (mΩ) max. 20°C, 100KHz	Ripple current (mA rms) 105°C, 100KHz	Case size ∅D×L (mm)	Dissipation factor (tan δ)	Leakage current (μA)	ESR (mΩ) max. 20°C, 100KHz	Ripple current (mA rms) 105°C, 100KHz
100	101	6.3 × 9.5	0.12	500	32	2900					
150	151					10 × 12	0.12	1050	28	2600	
180	181	8 × 12	0.12	900	16	4650					

WV (V)		50 (1H)				
Cap. (μF)	Parameter	Case size ∅D×L (mm)	Dissipation factor (tan δ)	Leakage current (μA)	ESR (mΩ) max. 20°C, 100KHz	Ripple current (mA rms) 105°C, 100KHz
68	680	10 × 12	0.12	680	20	4300